

Quick Start User Guide


Initial Installation and use



IMPORTANT - SAFE MODE: PLEASE ENSURE TRAP IS IN SAFE MODE BEFORE YOU REBAIT/CLEAR OR PERFORM TRAP MAINTENANCE




1 - Open lid fully until lid 'clicks' into open position - ensuring trap is in '**SAFE MODE**'. Keep hands **SECURELY** on lid and rear as per picture. Do not let go of lid or rear of trap until lid is in **FULLY OPEN POSITION**

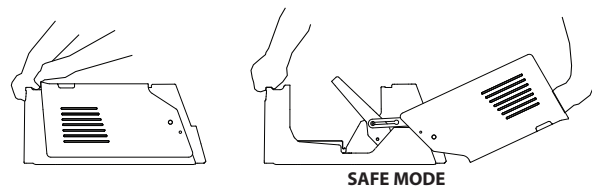


2 - Remove Ground Pegs from inside trap - located on top of treadle


3 - Position trap in a suitable location ensuring the lid can be **FULLY OPENED** and target animals have a clear path to approach the trap entrance




4 - Secure the trap to the ground with the included ground pegs




5 - Position your chosen bait in the rear of the trap inside bait well (pre-feeding inside entrance is also recommended)




6 - Shut lid **SLOWLY** - when the lid is swung past vertical during closing, **THE TRAP IS ACTIVE** - ensure hands remain in positions on lid and rear of trap at all times until trap is closed




7 - Pink capture flag should be down/flat - indicating that the trap is set. If flag is up, repeat above step ensuring that lid is closed **SLOWLY**




8 - To deactivate trap, use a stick poked through entrance to fire trap, capture flag will raise and audible 'bang' will be heard. No harm will be done to the trap by 'dry-firing'.



9 - To clear animal from trap (capture flag in up position), open lid to **FULLY OPEN POSITION** and remove carcass. Repeat steps 5-7 for resetting.



10 - To calibrate or adjust setoff weight; Fix trap to the ground, swing the lid all the way open to the set/safe position, then retract the lid back to a vertical position. Hold/secure the lid in vertical position (firmly), ensuring not to deactivate the trap. Use a known weight (ie fishing sinker) and slowly lower onto the leading edge of the treadle. Turn setoff weight adjustment screw counterclockwise to reduce triggering weight, or clockwise to increase triggering weight. Start heavy and work down until the trap just delatches at the desired setoff weight. Note Traps are pre-configured to 100g set-off from the factory.



For best results ensure trap is checked regularly and fresh bait is used frequently
Ensure all safety precautions are followed as per manufacturers recommendations
For use by trained operators only
For comprehensive and video instructions go to rewild.nz/product-info/

3 Year manufacturers warranty against any defects or mechanical failures resulting from ordinary use in conjunction with Manufacturers instructions
For terms and conditions visit rewild.nz

Made in Aotearoa New Zealand